Let's make sailing safer

At Mac N Hom Marine Equipments (P) Ltd., we are focused on range of products that meet the ever increasing demands of Marine based customers in terms of sophistication and diversification. We have brought to market innovative products, one after another to provide only the highest quality goods and services for your requirements and offer customised solutions and challenging applications quickly and cost effectively.







HYDRAULIC STEERING SYSTEMS



Tanker Barges – 2 Nos., Cochin Bunkers Pvt. Ltd.





Ambulance Boat - 3 Nos.
Saraswathi Metal Works to Cochin Shipyard Ltd. -



Passenger Boats, SEACON, Vishakhapatnam



20 Ton Bollard Pull Tug, Seaglitters Offshore, Mumbai



- Torque rating up to 700kg.m
- Tiller Arm turn up to 45 degrees on both sides
- Used in Catamaran & Single Rudder vessels
- Used in Cargo Barges/Water Barges & Deep sea Ambulances
- Heavy Duty Ram Size: 40mm x 2 nos

Package Included

Electro-Hydraulic Package Includes:

- Joystick Control Panel with Audio Visual Alarms
- ★ Hydraulic Power pack & Sensors
- Emergency Manual-Hydraulic Steering Marine Painted Ferruled seamless steel Tubes & Hoses
- ★ Hydraulic Actuator JumboZ-500

Manual-Hydraulic Package Includes:

- ★ Steering Wheel Wooden/SS
- ★ Helm Pump & Steering Column
- Marine Painted Ferruled Seamless steel Tubes & Hoses
- ★ Hydraulic Actuator-JumboZ-500
 - 1 Joystick Operated Control Panel with audio visual alarms
- 2 Electro Hydraulic Power Pack with Sensors for Electro Hydraulic Package
- 3 Marine Paint Coated, Ferruled Nut ends Seamless Steel Tubes for Smooth
- 4 Emergency Manual Hydraulic version with Helm Pump, Steering Wheel & Self Priming Unit











57/187-C, 'VRINDAVAN', Chilavannur Road, Kadavanthra, Kochi-682 020, Kerala, India Mob.: + 91 9072900576, +91 484 2312396, 2319998, E-mail: info@macnhomsystems.com web site: www.macnhomsystems.com

CIN: U29308KL2018PTC055182



SPECIFICATIONS

· Actuator Ram Diameter : 40 mm. x 2


· Actuator Stroke : 440 mm.

· Force @ 70 Kg / cm² Hydraulic Pressure : 2444 Kgf.

· Torque with 300mm. Tiller Arm upto $\pm 45^{\circ}$ turn from Midship.


(Actuator Pin to Rudder Shaft Centre distance : 300mm.) :714 Kg.m.

MOUNTING ARRANGEMENT OF HYD. ACTUTOR JumboZ-500 - IRS

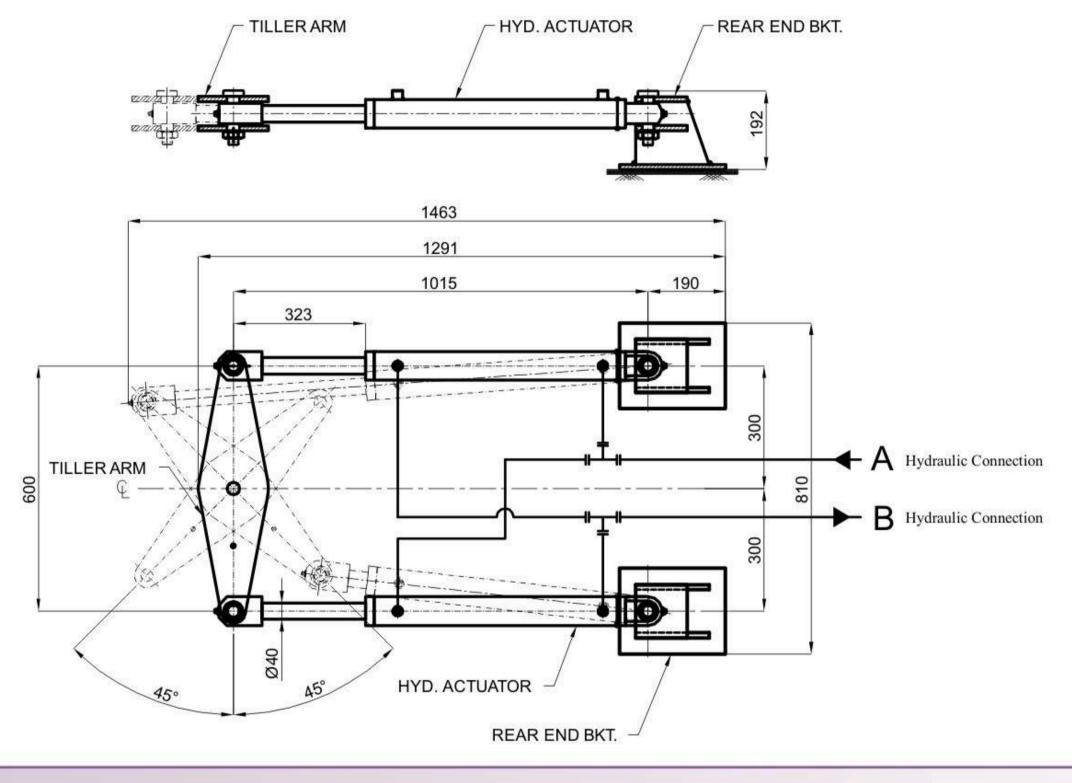

DATA FOR STEERING SELECTION

Length of the Vessel	Meters
Breadth of Vessel	Meters
Draft of the Vessel	Meters
Hull form (Mono / Catamaran)	
No of Engines	Nos
Power of each Engine	HP
Speed of Vessel	Knots
RUDDER DETAILS (See Rud	der Dwg.)
Breadth of Rudder A	Meters
Breadth of Semi-balanced Area B	Meters
Height of Rudder H	Meters

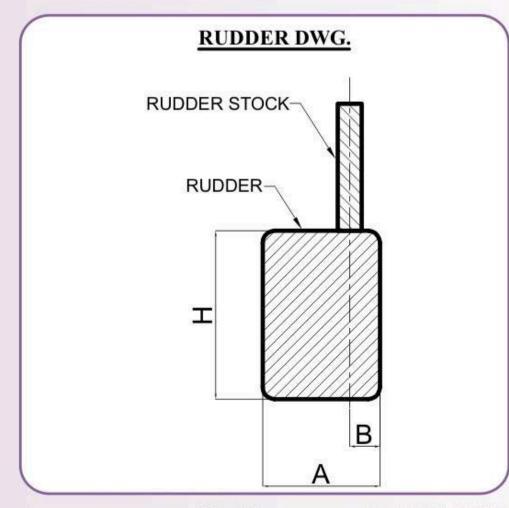

- NOTES: 1. Please fill in this data sheet with your Vessel data, and email to info@macnhomsystems.com OR Whatsapp to +91 90729 00576.
 - 2. All dimensions are in mm.
 - 3. Dimensions are reference purpose only; kindly confirm with our Technical Department.

