Let's make sailing safer

At Mac N Hom Marine Equipments (P) Ltd., we are focused on range of products that meet the ever increasing demands of Marine based customers in terms of sophistication and diversification. We have brought to market innovative products, one after another to provide only the highest quality goods and services for your requirements and offer customised solutions and challenging applications quickly and cost effectively.







HYDRAULIC STEERING SYSTEMS

Model: JumboZ-1500 IRS Type Approved

Type: Twin Actuators

Ram Dia: 45 x 2 Stroke: 440 mm

Torque: 1778 Kg.m for a Tiller Arm having radius 300 mm

JumboZ-1500 JumboZ-1500 **Tugs & Bollard Pullers Medium Barges** Heavy duty Purse-seins Trawler Fishing Vessels

AL SHARQIYAH-2,0man



MV LGT NAVYA BARGE – 2 Nos. Konkan Barge Builders Pvt. Ltd., Mumbai



2250 T Coal / Ore Carrier - 5 Nos.



Torque rating up to 1778kg.m

- © Tiller Arm turn up to 45 degrees on both sides
- Used in catamaran , single rudder vessels cargo barges/water barges & deep sea vessels
- Heavy Duty Ram Size: 45 x 2nos

Package Included

1.JumboZ-1500- E (Electro-Hydraulic):

- · Joystick Control Panel
- Relay panel
- Powerpack panel
- Junction box
- · Hydraulic Power pack & Sensors
- · Emergency Manual-Hydraulic Steering
- Marine coated Ferruled Tubes & Hoses
- Hydraulic Actuator JumboZ-1500

2 .JumboZ-1500 ED (Engine Driven):

- · Jacketed Hydraulic Power pack with sea water cooling provision
- · Steering Wheel Wooden (27") /SS (24")
- · Helm Pump, Steering Column & Self priming unit
- · Marine Painted Ferruled Seamless steel Tubes &
- · Emergency Manual-Hydraulic Steering
- Hydraulic Actuator JumboZ-1500
- Joystick Operated Control Panel with audio visual alarms
- Electro Hydraulic Power Pack with Sensors for Electro Hydraulic Package
- 8 Marine Paint Coated, Ferruled Nut ends Seamless Steel Tubes for Smooth
- Emergency Manual Hydraulic version with Helm Pump, Steering Wheel & Self Priming Unit











57/187-C, 'VRINDAVAN', Chilavannur Road, Kadavanthra, Kochi-682 020, Kerala, India Mob.: + 91 9072900576, +91 484 2312396, 2319998, E-mail: info@macnhomsystems.com web site: www.macnhomsystems.com

CIN: U29308KL2018PTC055182




SPECIFICATIONS

Actuator Ram Diameter

 Actuator Stroke : 440 mm. • Force @ 70 Kg / cm² Hydraulic Pressure : 5930 Kgf.


• Torque with 300 mm. Tiller Arm upto $\pm 45^{\circ}$ turn from Midship.

(Actuator Pin to Rudder Shaft Centre distance: 300 mm.) : 1778 Kgm.

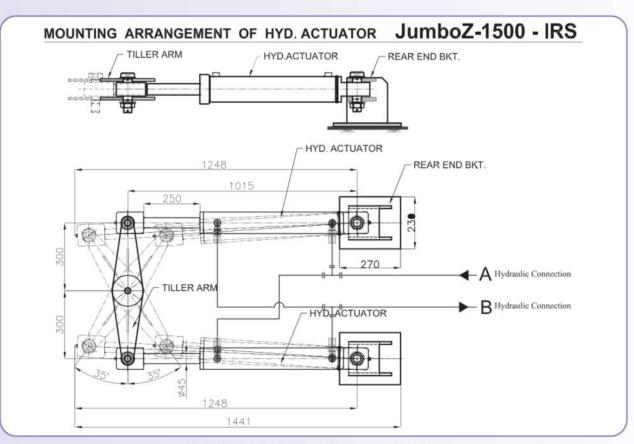

DATA FOR STEERING SELECTION

Length of the Vessel	Meters
Breadth of Vessel	Meters
Draft of the Vessel	Meters
Hull form (Mono / Catamaran)	
No of Engines	Nos
Power of each Engine	HP
Speed of Vessel	Knots
RUDDER DETAILS (See Rudder	Dwg.)
Breadth of Rudder A	Meters
Breadth of Rudder A Breadth of Semi-balanced Area B	Meters Meters
	(7)(5,7020)



: 45 mm. x 2

- NOTES: 1. Please fill in this data sheet with your Vessel data, and email to info@macnhomsystems.com OR Whatsapp to +91 90729 00576.

 - All dimensions are in mm.
 Dimensions are reference purpose only; kindly confirm with our Technical Department.

