# Let's make sailing safer

At Mac N Hom Marine Equipments (P) Ltd., we are focused on range of products that meet the ever increasing demands of Marine based customers in terms of sophistication and diversification. We have brought to market innovative products, one after another to provide only the highest quality goods and services for your requirements and offer customised solutions and challenging applications quickly and cost effectively.







# Hydraulic Steering Systems: Model. HERCULES



Balanced Hydraulic actuator- **Model: HERCULES** With Swivel Rod Eye to Connect with Tiller Arm

- ▶ More than 150 installations in Passanger Ferries of 100/200 pax, medium Barges, Choonda Boats.
- ▶ Torque Rating of 750Nm (with 180mm Tiller Arm)
- ▶ Heavy Duty Ram size: 25mm
- Second Thread on other end Piston Rod for Emergencies.
- ▶ 12 Months Warranty against Manufact. Defects
- ◆ On-Line Installation and Service Support
- ▶ Spares including Seal kits readily available
- Manual-Hydraulic Version with Helm Pump, Steering Wheel
- Marine Paint Coated, Ferruled Nut ends Seamless Steel Tubes for Smooth Oil Flow
- O Joystick operated Control Panel with Audio-Visual Alarms
- Electro-Hydraulic Power pack with Sensors for Electro Hydraulic Version
- Self-Priming Unit

### Manual-Hydraulic Package:

- Steering Wheel Wooden/SS
- Helm Pump, Steering Column & Self priming unit
- Marine Painted Ferruled Seamless
- steel Tubes & Hoses
  Hydraulic Actuator-HERCULES

#### **Electro-Hydraulic Package:**

- Joystick Control Panel
- Hydraulic Power pack & Sensors
- Emergency Manual-Hydraulic Steering
- ❖ Marine coated Ferrules Tubes & Hoses
- Hydraulic Actuator HERCULES





57/187-C, 'VRINDAVAN', Chilavannur Road, Kadavanthra, Kochi-682 020, Kerala, India
Mob.: + 91 9072900576, +91 484 2312396, 2319998, E-mail: info@macnhomsystems.com web site: www.macnhomsystems.com
CIN: U29308KL2018PTC055182



#### **SPECIFICATIONS**


· Actuator Ram Diameter : 40 mm. : 260 mm. · Actuator Stroke · Force @ 45 Kg. / cm² Hydraulic Pressure : 930 Kgf.

• Torque with 180 mm. Tiller Arm for  $\pm 45^{\circ}$  turn from Midship

(Actuator Pin to Rudder Shaft Centre distance : 180 mm.)


• Torque with 220 mm Tiller Arm for  $\pm 35^{\circ}$  turn from Midship

(Actuator Pin to Rudder Shaft Centre distance: 220 mm.) : 317 Kgm.

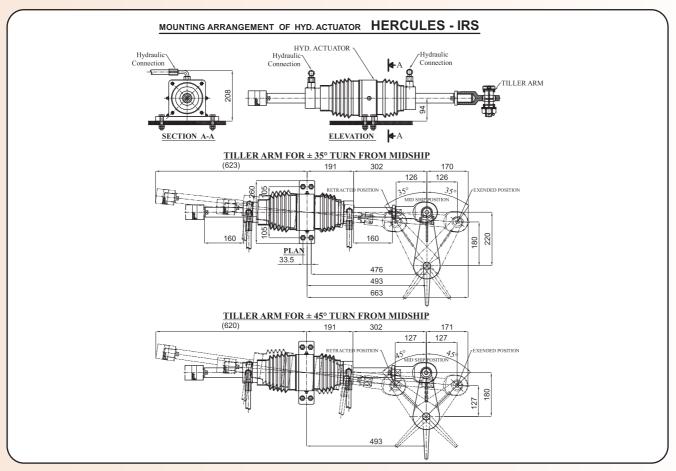

### **DATA FOR STEERING SELECTION**

Length of the Vessel	Meters
Breadth of Vessel	Meters
Draft of the Vessel	Meters
Hull form ( Mono / Catamaran )	
No of Engines	Nos.
Power of each Engine	HP
Speed of Vessel	Knots
RUDDER DETAILS (See Ru	ıdder Dwg.)
Breadth of Rudder A	Meters
Breadth of Semi-balanced Area B	Meters
Height of Rudder H	Meters
Number of Rudders	Nos.



: 259 Kgm.

- NOTES: 1. Please fill in this data sheet with your Vessel data, and email to info@macnhomsystems.com OR Whatsapp to +91 90729 00576.
  - 2. All dimensions are in mm.
  - 3. Dimensions are reference purpose only; kindly confirm with our Technical Department.

